

Elegantia Carmine red



COLOUR

Carmine red

Product description

The bricks are formed individually in the unsanded mould to a solid mass, pressed from clay of alluvial origin from an area located in the Scheldt basin and fired in a tunnel oven at a temperature of approximately 1180°C. On the narrow side the bricks have an unsanded surface structure.

TECHNICAL CHARACTERISTICS

The pavers are delivered with the following characteristics, in accordance with the CE and UKCA mark:

CE label according to EN 1344 : 2013 / AC : 2015

Manufacturing dimensions (L x W x H) : *235x36x72 mm


Quantity / m² with a traditional joint : ca. 111

PHYSICAL AND MECHANICAL PROPERTIES ACCORDING TO EN 1344: 2013 / AC: 2015

| Aspect | Class | Mean | Individual |
|----------------------------|--------|-------------------------|-------------------------|
| Water absorption NBN EN771 | W3 | Max 5% | Max 6% |
| Transverse breaking load | T4 | Min 80 N/mm | Min 64 N/mm |
| Abrasion resistance | A2 (+) | Max 600 mm ³ | Max 800 mm ³ |
| Frost resistance | FP100 | freeze/thaw resistant | freeze/thaw resistant |
| Wet skid resistance | U3 | >55 | |
| Acid resistance | C | < 7% | |
| Size tolerance | R1 | Max. ± 0,4 √d | Max. 0,6 √d |

Elegantia Carmine red

Productshot

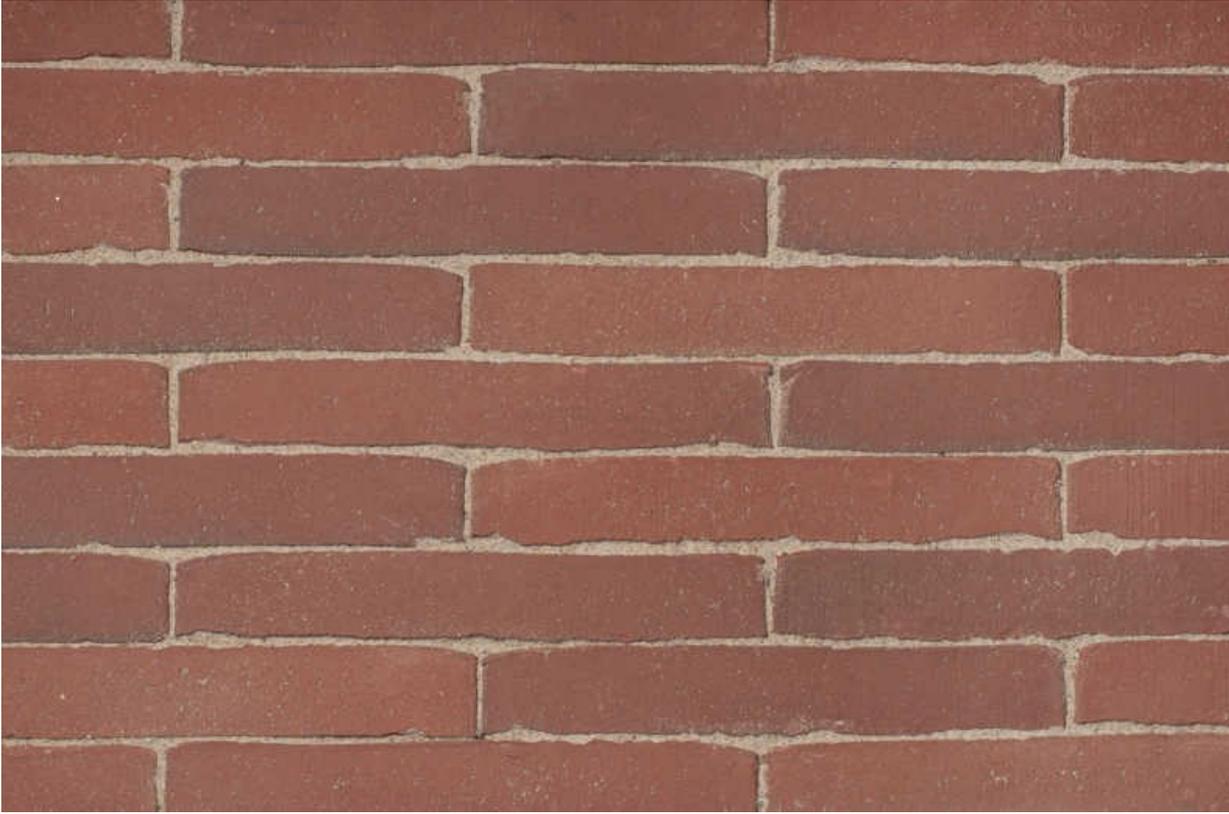

VANDE MOORTELE
CLAY PAVERS • FACING BRICKS • SLIPS

ORIGIN : VANDE MOORTELE NV | Scheldekant 5 | BE-9700 OUDENAARDE |
T +32 (0)55 33 55 66 | BTW BE 0432.038.790 | - info@vandemoortel.co.uk